


# DMX to PWM Translator



The LS67200 translates standard DMX-512 digital control signals to PWM (pulse width modulation) to control a range of Lumascape's PWM compatible LED luminaires. The LS67200 supports 3 channels. Connect to any compatible DMX digital controller to achieve dimming and various colour changing patterns.

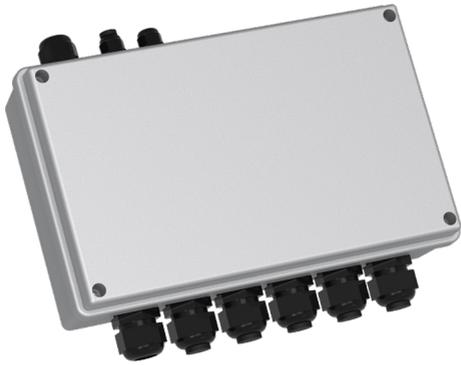

## Electrical

<b>Input Voltage</b>	24 V DC or 12 V AC, 50/60 Hz
<b>Rating</b>	25W max
<b>Output</b>	24 V DC PWM-200 Hz
<b>Channels</b>	3
<b>Ambient Operating Temperature</b>	-30 °C to 50 °C

## Control


<b>Dimming Options</b>	DMX 512 (optically isolated)
------------------------	------------------------------

## Certification


<b>IP Rating</b>	IP65
<b>Certifications</b>	CE, RCM

## Technical Drawings

### Top View

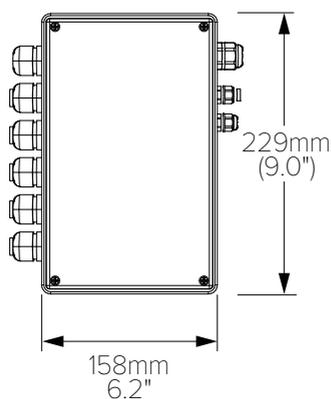


### Side View

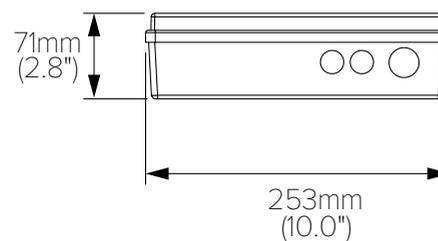

Products and specifications are subject to change without notice.

# DMX to PWM Translator

## Network Topology - Low Voltage

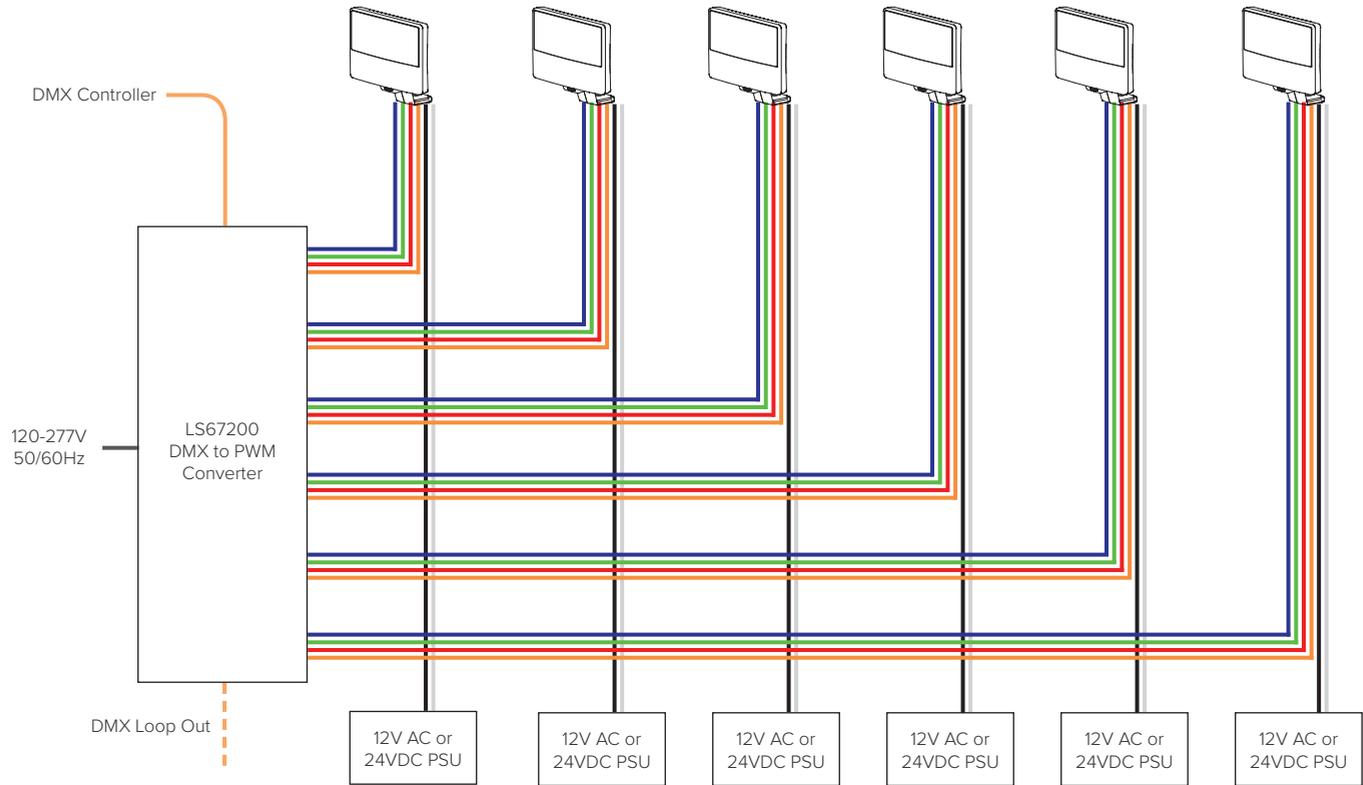

- Up to six luminaires addressed and controlled individually
- All luminaires have individual, integral drivers
- Luminaires powered by individual power supplies

Products and specifications are subject to change without notice.