




### LS573LED-2-1B2-N

Vedi Mini with 316 stainless steel cover, 1W blue LED source, narrow beam, 12V AC

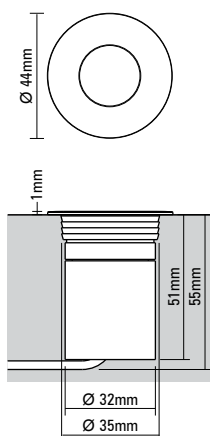

## SPECIFICATIONS

<b>Lamp Source</b>	1W Luxeon K2 LED
<b>Voltage</b>	Low voltage: 12V AC (Magnetic trans. only) NOTE: Requires remote driver / transformer. Optional remote constant current driver. Refer to C1916 for Transformers & Drivers. Order separately.
<b>Beam Angles</b>	Narrow beam 10° Medium beam 25° Flood beam 140°
<b>LED Colours</b>	<input type="checkbox"/> White (5300K typ.) <input type="checkbox"/> Warm white (3300K typ.) <input checked="" type="checkbox"/> Blue Availability of other colours on request. Minimum order quantities may apply.
<b>IP Rating</b>	IP68
<b>Housing Material / Finish</b>	Brass and polymer
<b>Cover Material / Finish</b>	316 stainless steel Brass Powdercoat (Brass only) <input checked="" type="checkbox"/> Black <input type="checkbox"/> White <input type="checkbox"/> Silver Custom powdercoat colours available
<b>Lens / Options</b>	Toughened glass
<b>Mounting Options</b>	Direct burial
<b>Cable length</b>	3m standard Other lengths available on request.
<b>Static Load Rating</b>	650kg
<b>Impact Rating</b>	IK10
<b>Ambient Temp. Rating</b>	-20°C to 50°C
<b>Warranty</b>	5 year structural 12 month electrical

### HOW TO SPECIFY...

PRODUCT	COVER	SOURCE	OPTICAL SYSTEM						
CODE	FINISH	CODE	DESCRIPTION	BEAM	CODE				
LS573LED	Stainless steel	2	12V AC	1W	White	1W2	Narrow	10°	N
	Brass	3			Warm White	1H2	Medium	25°	M
	Powdercoated: Black	4			Blue	1B2	Flood	140°	F
	Powdercoated: White	5							
	Powdercoated: Silver	6							

**EXAMPLE** LS573LED-5-1W2-F Vedi Mini 316 stainless steel cover powdercoated white, 1W white LED source, flood beam, 12V AC