




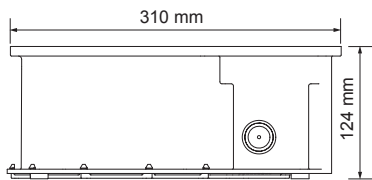

LS353 20W MH
Shallow inground



LS353
with Pre-installation kit
(supplied standard)




SPECIFICATIONS

Lamp source	MH Philips CDM-TM PGJ5 (20W)
Voltage	Line voltage: 220 – 240V, 50/60 Hz
Beam angles	Narrow beam 12° Medium beam 30° Flood beam 54° Wide flood beam 74°
Adjustability	0°-15° vertical tilt 365° horizontal rotation
IP rating	IP68
Construction	316 marine grade stainless steel UV stabilised 30% glass filled PBT/PC high impact strength polymer
Glass	OptiClear™
Cable entry	Side or bottom
Ambient operating temperature	-20°C to 40°C
Warranty	10 years structural, 1 year electrical

ACCESSORIES

Stacking and order of Accessories

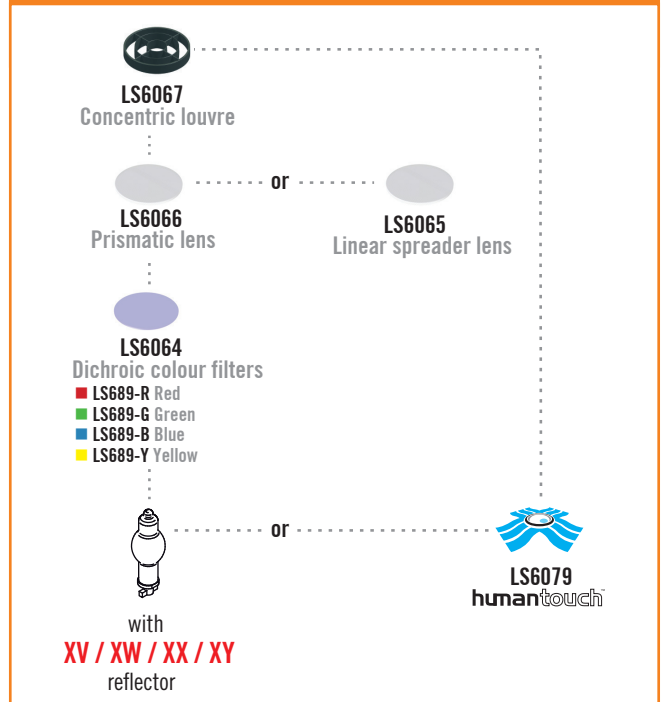

MH / HIT Version

PRODUCT	Code	LAMP	WATTAGE	BASE	Code	LENS	Code	COVER	FINISH	Code	CABLE	Code	REFLECTOR	BEAM	Code	VOLTAGE	Code
Inground	LS353	MH CDM-TM	20W	PGJ5	227	OptiClear™	A	Stainless Steel	Polished	M	25mm conduit adaptor	-	Aluminium	Narrow	12°	220-240V 50/60Hz	1
						GripGlass™	G		Brushed	N	Single gland entry	84		Medium	30°		
						Borosilicate	X				MicroAntileach™			Flood	54°		
														Wide flood	74°		