



The LS275 is a compact, surface mounted fountain light with a long history in high performance applications. Constructed of high pressure die-cast brass, this luminaire is best known for its corrosion resistance and flawless performance. An LED alternative to the halogen lamp option allows for the creative introduction of colour and improved energy efficiency.

**SPECIFICATIONS**



<b>Lamp Source</b>	Halogen MR16 (GU5.3) 50 W max <sup>(1)</sup>
<b>IP Rating</b>	IP68
<b>Submersion Depth</b>	1.5 m
<b>Construction</b>	Die-cast brass
<b>Installation Type</b>	Surface mount
<b>Standard Inclusions</b>	<b>MicroAntiLeach™</b> cable entry Thermal cutout 5 m cable <i>For extra cable length consult factory</i>
<b>Water Temperature Rating</b>	5 °C to 40 °C
<b>Warranty</b>	5 year structural, 1 year electrical
<b>Accessories</b> <i>Order separately</i>	<b>LS632</b> mounting plate <b>LLLS</b> linear spreader lens <b>LS643-R/G/B/Y</b> dichroic filters
<b>Photometrics</b>	Use photometry files from your lamp manufacturer

NOTE: Product specifications are subject to change without notice. Any luminaire can become hot - take care with appropriate use and placement.

<sup>(1)</sup> Nominal power consumption only, actual power consumed may vary.




**LS275A Star II**




**LS632 Mounting Plate**  
*Order separately*

**CONFIGURE THIS PRODUCT >**

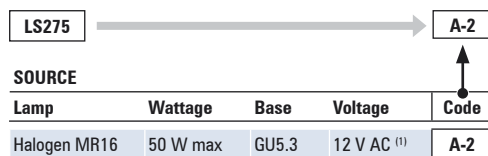

<sup>(1)</sup> Requires remote transformer.

**ACCESSORIES**

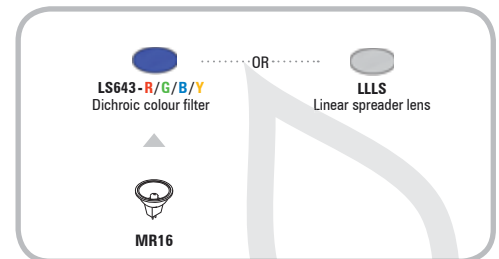

Other accessory stacking options may be available - consult factory