




The LS333ANS-2LED is a swimming pool light and one of Lumascape's most popular luminaires, constructed entirely of 316 marine grade stainless steel. It has a special alignment feature to ensure the beam of light is perpendicular to the installation surface, even if the pre-installation blackout niche is not. This LED alternative to the halogen lamp option allows for the creative introduction of colour and improved energy efficiency.

SPECIFICATIONS

LED Source	LED 3 W or 6 W ⁽¹⁾
	<input type="checkbox"/> White (4300 K typical) <input type="checkbox"/> Warm white (3000 K typical) <input type="checkbox"/> Blue (470 nm) <i>Other colours by request</i>
	LED 6 W ⁽¹⁾
	<input type="checkbox"/> RGB
IP Rating	IP68
Submersion Depth	2 m
Construction	316 marine grade stainless steel
Installation Type	Pre-installation blackout niche
Standard Inclusions	Integral driver with field intensity setting
	Teflon coated cover screws
	MicroAntiLeach™ cable entry
	Thermal cutout
	5 m cable
Dimmable	Using LS6125 0-10 V dimming <i>NOTE: 4 wires circuit required to be run to luminaire</i>
Water Operating Temperature	5 °C to 40 °C
Warranty	5 year structural, 1 year electrical
Accessories <i>Order separately</i>	LS6125 0-10 V dimmer system
	LS6122 wall plate dimmer
	LS67560-2 remote RGB driver
Photometrics	Go to www.lumascope.com.au ▶ Technical Data ▶ Photometric Files



LS333ANS-2LED

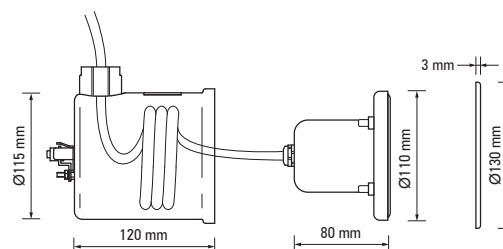

NOTE: Product specifications are subject to change without notice. Any luminaire can become hot - take care with appropriate use and placement.

⁽¹⁾ Nominal power consumption using a DC power supply. Actual power consumed may vary. Power supply not included.

CONFIGURE THIS PRODUCT >

LED SOURCE			OPTICAL SYSTEM			SUPPLY VOLTAGE			
Wattage	Colour	Code	Beam		Code	Voltage	Code		
3 W	White (4300 K typical)	3W4	Narrow ⁽¹⁾	14°	N	24 V DC or 12 V AC ⁽¹⁾	7		
	Warm white (3000 K typical)	3H6	Medium	30°	M	<i>non-dimmable</i>			
	Blue (470 nm)	3B4	Wide	40°	W	24 V DC or 12 V AC ⁽²⁾	27		
6 W	White (4300 K typical)	6W4	⁽¹⁾ Not applicable for RGB. NOTE: Beam angle values are nominal.				Remote RGB driver ⁽³⁾	R	
	Warm white (3000 K typical)	6H6							
	Blue (470 nm)	6B4							
	RGB ⁽¹⁾	6M4							

⁽¹⁾ Must select voltage code R.

⁽¹⁾ Requires remote power supply or transformer

⁽²⁾ Requires 4 wires to run luminaire and **LS6125** - order separately.

⁽³⁾ RGB only. Requires **LS67560-2** - order separately.