




The LS511A-1 and LS521A-1 are machined finish luminaires providing a distinctive appearance which is complementary to modern architectural designs. Both luminaires are constructed from 316 marine grade stainless steel with Lumascope's proprietary **ElectroPolishPlus™** process to give a long life to the surface finish, even in coastal environments.



SPECIFICATIONS

Lamp Source LS511A-1	Halogen MR16 IRC (GU5.3)	35 W max
Lamp Source LS521A-1	Halogen MR16 IRC (GU5.3)	2 x 20 W max
IP Rating	IP56	
Construction	316 marine grade stainless steel	
Installation Type	Wall mount	
Standard Inclusions	Internal glare control louvre Slide & lock mounting mechanism	
Ambient Operating Temperature	-20 °C to +50 °C	
Warranty	10 year structural, 1 year electrical	
Accessories <i>Order separately</i>	LLLS Linear spreader lens LS643-R/G/B/Y Dichroic colour filters	
Photometrics	Use photometry files from your lamp manufacturer	


NOTE: Product specifications are subject to change without notice. Any luminaire can become hot - take care with appropriate use and placement.

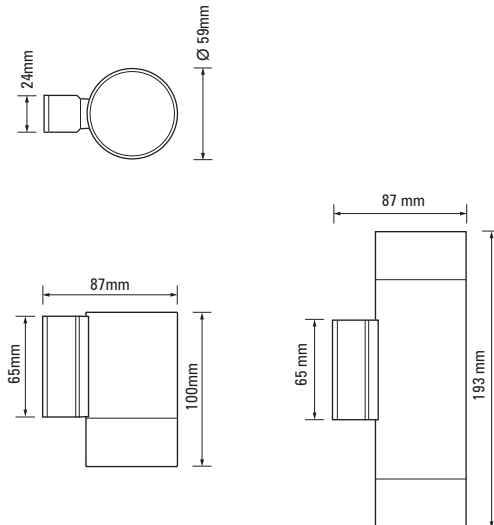

CONFIGURE THIS PRODUCT >

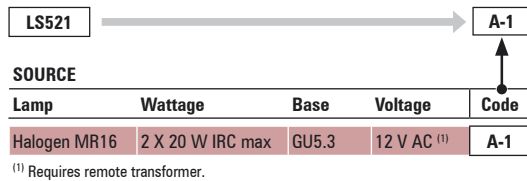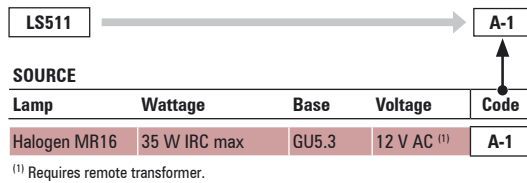

ACCESSORIES

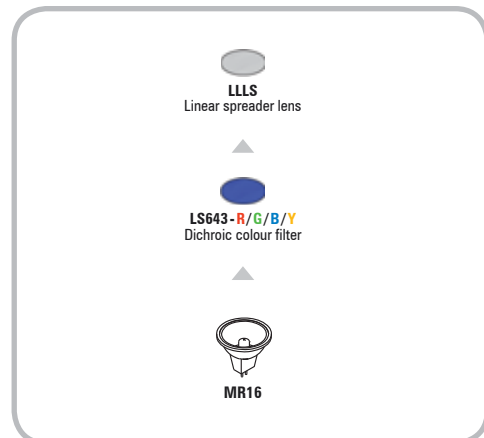

Other accessory stacking options may be available - consult factory