




The LS9401LED and LS9403LED are small but versatile luminaires. The LS9401LED is fitted with an installation sleeve which can be cut to fit, allowing for a wide variety of custom installations. The LS9403LED comes with a pre-installation niche ideal for pathways, entrances and other outdoor applications. Constructed from 316 marine grade stainless steel these luminaires come with Lumascape's proprietary **ElectroPolishPlus™** as standard on stainless steel finish.

SPECIFICATIONS

LED Source	LED 2 W ⁽¹⁾ <input type="checkbox"/> White (4300 K typical) <input type="checkbox"/> Warm white (3000 K typical) <input type="checkbox"/> Blue (470 nm)
Control Signal	PWM <i>Optional for 24 V DC and 12 V AC versions</i>
IP Rating	IP68
Construction	316 marine grade stainless steel bezel
Installation Type	LS9401LED Installation sleeve <i>Supplied as standard</i> LS9403LED Pre-installation concrete blackout niche <i>Supplied as standard</i>
Static Load Rating	450 kg
Impact Rating	IK10
Standard Inclusions	Integral driver with field intensity setting OptiClear™ MicroAntiLeach™ cable entry 8 m cable
Ambient Operating Temperature	-20 °C to 50 °C
Warranty	5 year structural, 3 year LED and driver
Accessories	LS6125 0-10 V dimmer system <i>Order separately</i> LS6122 wall plate dimmer
Photometrics	Go to www.lumascape.com.au ▶ Technical Data ▶ Photometric Files
Glass Temperature	HumanTouch™ compliant ≤65 °C



LS9401LED & LS9403LED Vedita

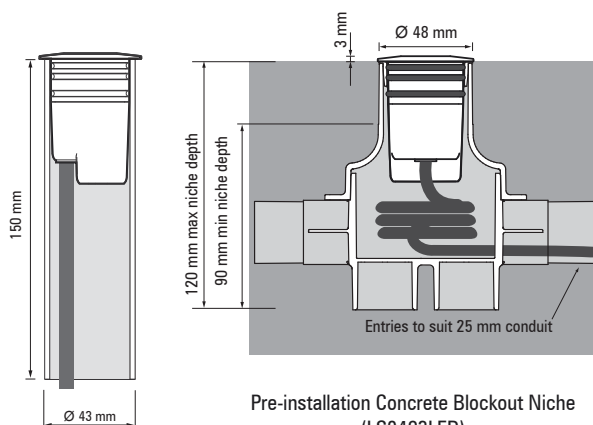


Installation Sleeve (LS9401LED)

Pre-installation Concrete Blockout Niche (LS9403LED)

NOTE: Product specifications are subject to change without notice. Any luminaire can become hot - take care with appropriate use and placement

⁽¹⁾ Nominal power consumption using a DC power supply. Actual power consumed may vary. Power supply not included.

CONFIGURE THIS PRODUCT >

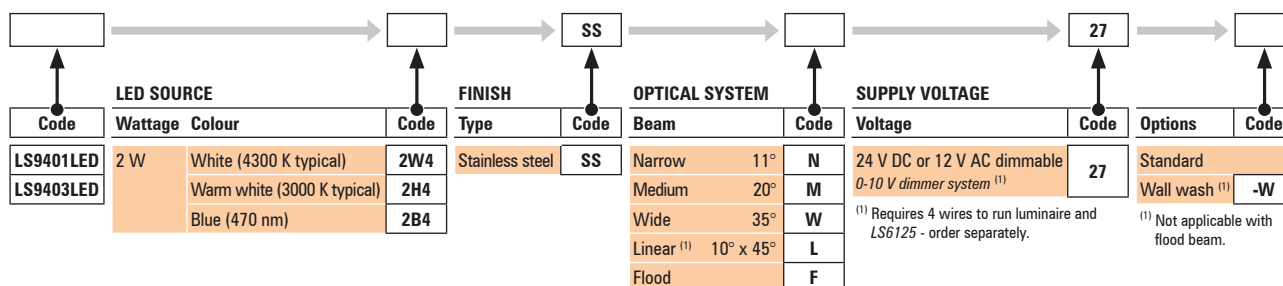

⁽¹⁾ Linear with wall wash filter creates a linear horizontal beam.

NOTE: Beam angle values are nominal.