



The LS275 is a compact, surface mounted fountain light with a long history in high performance applications. Constructed of high pressure die-cast brass, this luminaire is best known for its corrosion resistance and flawless performance. An LED alternative to the halogen lamp option allows for the creative introduction of colour and improved energy efficiency.

LED version see page 119.

### SPECIFICATIONS



Lamp Source	Halogen MR16 (GU5.3) 50 W max <sup>(1)</sup>
IP Rating	IP68
Submersion Depth	1.5 m
Construction	Die-cast brass
Installation Type	Surface mount
Standard Inclusions	MicroAntiLeach™ cable entry Thermal cutout 5 m cable <i>For extra cable length consult factory</i>
Water Temperature Rating	5 °C to 40 °C
Warranty	5 year structural, 1 year electrical
Accessories <i>Order separately</i>	LS632 Mounting plate LLLS Linear spreader lens LS643 - R/G/B/Y Dichroic filters
Photometrics	Use photometry files from your lamp manufacturer

NOTE: Product specifications are subject to change without notice. Any luminaire can become hot - take care with appropriate use and placement.

<sup>(1)</sup> Nominal power consumption only, actual power consumed may vary.




LS275A Star II




LS632 Mounting Plate  
*Order separately*

### CONFIGURE THIS PRODUCT >

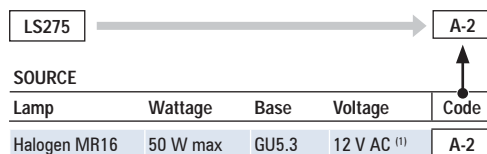

<sup>(1)</sup> Requires remote transformer - see page 239.

### ACCESSORIES

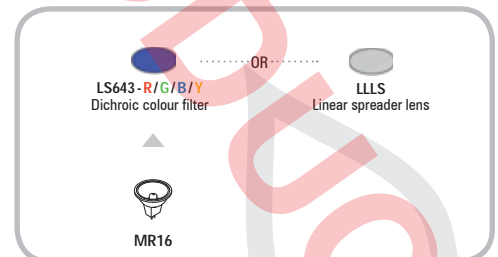

Other accessory stacking options may be available - consult factory