

# IMPORTANT INSTRUCTIONS

For installation of: pre-installation kit LS698-K

Warning: The Luminaire should only be used complete with its protective shield (cover)  
All connections must be kept dry; failure to do so may result in product reliability issues


Lumascap Lighting Industries Pty Ltd  
38-44 Enterprise Street, Cleveland, QLD 4163, Australia  
PO Box 1875, Cleveland D.C., QLD 4163, Australia  
T 07 3286 2299  
F 07 3286 6599  
E sales@lumascap.com.au  
W www.lumascap.com.au

## Important Note:

- This fixture is suitable for wall, floor and in ground mounting. Suitable for drive-over applications.

**CAUTION:** This product must only be installed by a licensed electrical worker

**1**

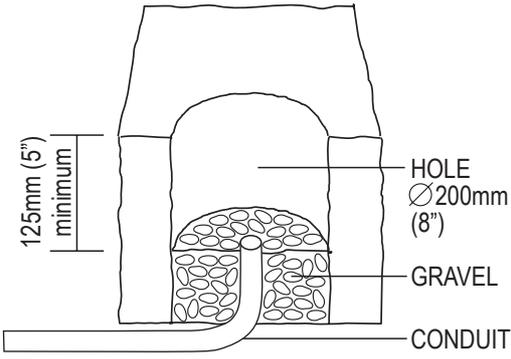

125mm (5") minimum

HOLE  
Ø200mm (8")

GRAVEL


CONDUIT

**HOLE DETAIL**

- Cast or Core drill void to accommodate the fitting as shown above.
- Ensure a neat hole is achieved.
- Ensure gravel or similar material forms the bottom of the cavity to allow for drainage.

**IMPORTANT NOTE:**  
Ensure that suitable connection access is available. Round fixture cable (size 5-10mm) is supplied. Electrical conduit is recommended.

**2**

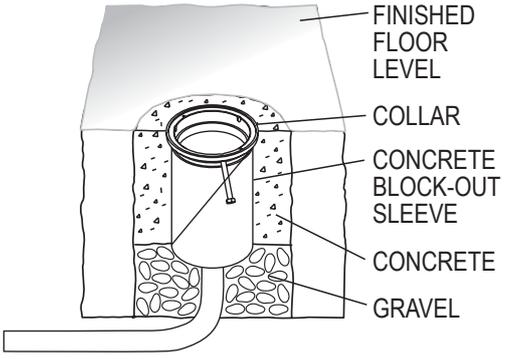

FINISHED FLOOR LEVEL

COLLAR

CONCRETE BLOCK-OUT SLEEVE


CONCRETE

GRAVEL

**CAST COLLAR AND SLEEVE**

- Cut concrete block-out sleeve if necessary (minimum overall length is 125mm).
- Place the collar and sleeve on the gravel bed.
- Ensure that the orientation is as desired.
- **Ensure that the collar is flush with the finished floor level.**
- Pour concrete. Check that the top surface of the collar is flush with the finished floor level.


**3**

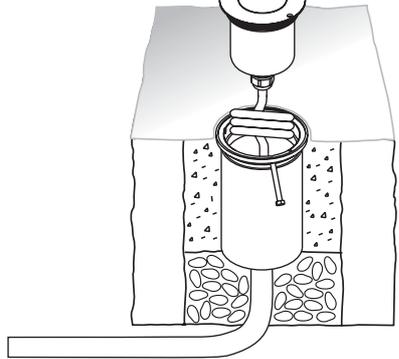

**CONNECT LED FIXTURE**

- Feed cable from fixture into the conduit and back to the supply.
- Ensure sufficient cable is coiled into the PVC pipe to allow the fixture to be removed for future maintenance.

**4**

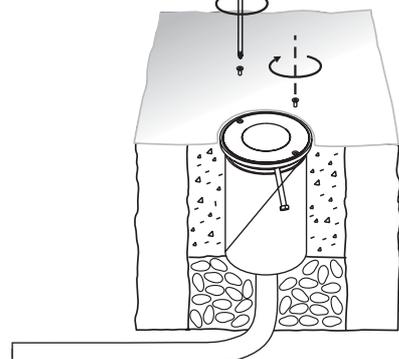

**FASTEN LED FIXTURE**

- Place the LED fixture inside the collar.
- Ensure that the holes in the fixture align with the holes in the collar.
- Use the screws provided to fasten the fixture into place.
- Tighten firmly.

**CAUTION: FITTINGS CAN BECOME VERY HOT. USE DISCRETION IN PLACEMENT**

**PLEASE ENSURE THAT INSTALLATION COMPLIES WITH LOCAL AUTHORITY STANDARDS**

## WARNING

DO NOT INTERFERE WITH OR DISCONNECT CABLE FROM FITTING. WARRANTY WILL BE VOID IF CABLE ASSEMBLY IS TAMPERED WITH.

[www.lumascap.com.au](http://www.lumascap.com.au)

## IMPORTANT SAFETY INSTRUCTIONS

### WARNING - To reduce the risk of FIRE or INJURY:

1. Luminaires and transformers to be installed by qualified installers only.
2. Luminaires to be used for intended purpose only. e.g Wall Mount fittings must be wall mounted.
3. Luminaires can become very hot. Use discretion in placement.
4. Do not touch hot lens, guard, or enclosure.
5. CAUTION - HOT SURFACE. Keep away from curtains and other combustible material.
6. Turn Off/Unplug and allow to cool before replacing lamp.
7. Keep lamp away from materials that may burn.
8. Never touch lamp with bare fingers. Oil from skin may damage lamp. Hold lamp with soft cloth when installing or replacing.
9. Do not operate the luminaires with a missing or damaged parts.
10. Replace any cracked protective shield
11. Use only lamp type, voltage and wattage as specified by Lumascape on the product label.
12. Use only genuine Lumascape parts to replace damaged or missing components.
13. Luminaires supplied with Loctite Silver Grade Anti Seize lubricant on threads. Reapply if needed.
14. Refer to instructions for installation and operating requirements.
15. Ensure installation complies with local regulations

### SAVE THESE INSTRUCTIONS.

LUMASCAPE  
 HEAD OFFICE - QLD  
 Tel (07) 3286 2299  
 Fax (07) 3286 6599

LUMASCAPE  
 SYDNEY - NSW  
 Tel (02) 9519 6860  
 Fax (02) 9519 8834

LUMASCAPE  
 MELBOURNE - VIC  
 Tel (03) 9686 1900  
 Fax (03) 9686 1700

LUMASCAPE USA INC.  
 SAN FRANCISCO - CA  
 Tel 1-(650)-595-5862  
 Fax 1-(650) 595-5820

H.I. LIGHTING  
 LUMASCAPE AGENT - WA  
 Tel (08) 9321 5422  
 Fax (08) 9321 5881

LIGHTING PARTNERS AUSTRALIA  
 LUMASCAPE AGENT - SA  
 Tel (08) 8232 0074  
 Fax (08) 8232 0076

NQ LIGHTING  
 LUMASCAPE AGENT - NTH QLD  
 Tel (07) 4031 4490  
 Fax (07) 4031 5933

ECC LIGHTING  
 LUMASCAPE AGENT - NZ  
 Tel (09) 379 9680  
 Fax (09) 308 9328